


All-in-One Containerized



Model: ZGF-CI-7-0.688-2.752

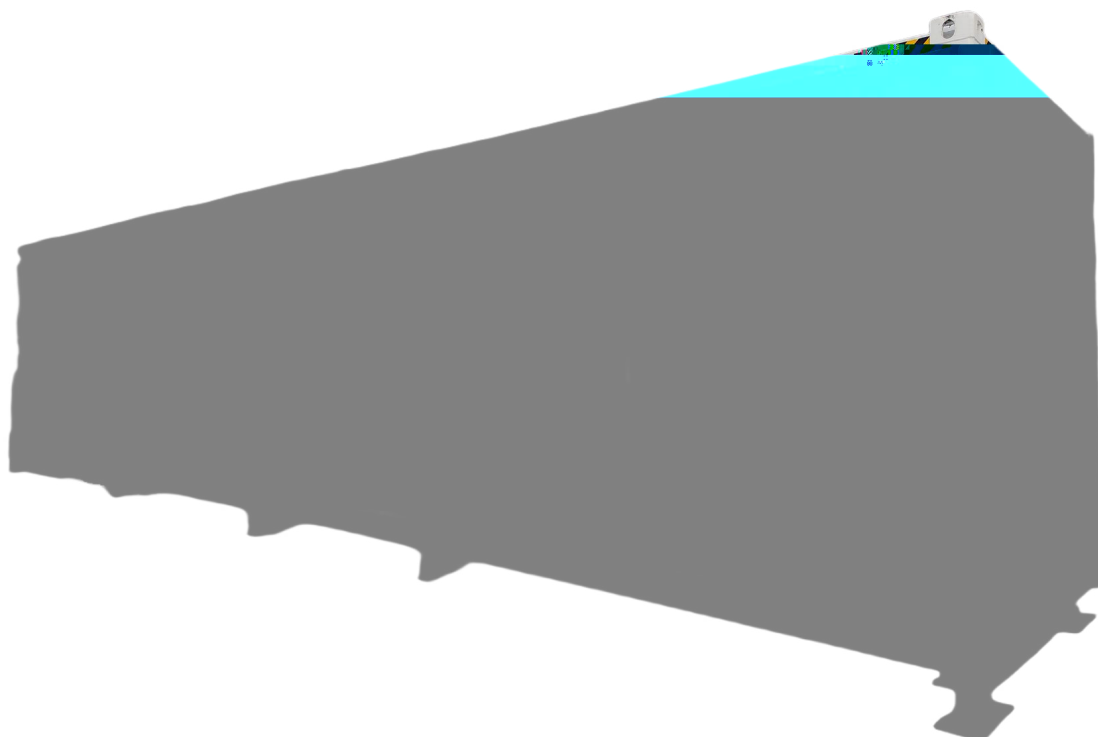

- LFP, 280 Ah cells
 - 0.688MWh/2.752MWh
 - All-in-one design
 - Air-forced cooling system
 - 40-foot pre-installing container
 - Conformance to EN IEC 61000-6-2, EN IEC 61000-6-4, CEI 0-16 IEC62933-5-2, UN 38.3, more upon demand
- and a back-up power pack-up power, peak shaving, microgrid, energy applications



Product Parameters

Battery System	
Pack configuration	1P16S
Pack qty. for each rack	24
Rack qty.	8
Rated charging/discharging current	70A*8
Max charging/discharging current	80A*8
Rated energy	2.752MWh
Rated capacity	2240Ah
Voltage range	1075.2~1382.4Vd.c.
Rated voltage	1228.8Vd.c.
Rated power	688kW
Over voltage category	OVC II
Power Conversion System	
Rated voltage	690Va.c. 3P/PE
Rated current	144Aa.c.*4
Max continous current	158Aa.c.*4
Rated active/apparent power	688kW
Max active/apparent power	756.8kW
Grid frequency	50Hz/60Hz
Power factor	-0.9~0.9
Over voltage category	OVC III
AC	
Rated voltage	35kVa.c. 3P
Rated current	13.2Aa.c.
Max continous current	14.5Aa.c.
Rated active/apparent power	800kW
Max active/apparent power	880kW
Grid frequency	50Hz/60Hz
Over voltage category	OVC IV
General Information	
Ambient temperature range	-20°C~55°C
Ingress protection	IPX4
Protection class	Class I
Working altitude	<2000m
Working noise	<70dB
Dimension(W*D*H)	12192(±5)mm*2438(±5)mm*2896(±5)mm
Weight	37100kg±500kg
Cooling method	Air cooling
Overload capability	Constant operation@110%; 1min@120%
Efficiency	Max 99%
Power response	<100ms
Communication protocol	Modbus-RTU, Modbus-TCP
Certification	EN IEC 61000-6-2, EN IEC 61000-6-4, CEI 0-16, IEC62933-5-2, UN 38.3

Product Components

8 sets of battery racks, 8 sets of control boxes, 4 sets of PCS, 1 set of thermal managing system
1 set of firefighting system, 1 set of battery managing system, 1 set of 35kV switch gear, 2 sets of transformers